



NEW

One single button LED dimmer Phlox® Dim light

Expected Life > 50 000 hours

Electrical

Input Voltage	Max 28 VDC (continuous mode)
Input Current	5 A (continuous mode)
Connector	Terminal for wire 0.32-3.3 mm ² (22-12AWG)
Pinout	See picture on the left
CE Conformity	Yes

Outer unit

L x W x H	93 x 77 x 23 mm ± 1 (3.66 x 3.03 x 0.91" ± 0.04)
Housing Material	Black Standard ABS
Weight	102 g ± 5 (3.6 oz ± 0.18)

Environmental


Max. Operating Humidity	60% non-condensing
Operating Temperature	50°C (122°F) max
Storage Temperature	60°C (140°F) max
Shelf life	12 months from date of purchase

Do not cover the dimmer when it's switched on.

Accessories

• Power supply:

Product key:ALIM-DIMLIGHT-EU
or ALIM-DIMLIGHT-US

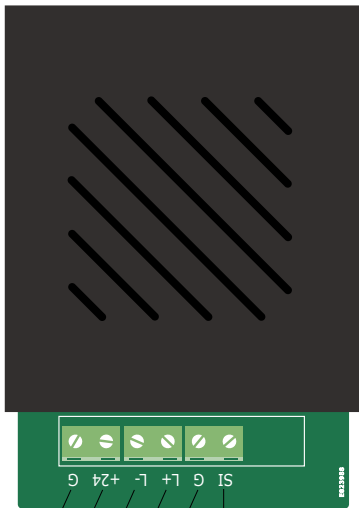

Ground (P-S)
+24V (P-S) Max: 28VDC
Ground (light)
Live wire (light)
Ground

Light intensity knob: intensity decreases if turned in a clockwise direction; goes off when turned all the way

Voltage of the potentiometer: light intensity can also be controlled by applying a voltage between 0 and 5 VDC, after setting the potentiometer to zero.

New Phlox® DIM LIGHT

A very compact and easy-to-use LED dimmer (One single button)

RoHS directive compliant

Each PHLOX DIM LIGHT is provided with:
- 24 months warranty

July 19 2017