

Manufacturer	Source colour	Light Output Area/Length	Injection process	Input voltage
PHLOX	LEDIR	OA - 100x100	LLUB	Q - 1R - 24V
	Source type	Product type	Range	Number of light sources' rows per cicu

PHLOX® EXCLUSIVE LIGHT PROCESS
WORLDWIDE PATENT ISSUED

NEW!

High Uniformity Infrared led On-Axis 100x100


PHLOX - LEDIR - OA - 100x100 - LLUB - Q - 1R - 24V



Illumination

Radiance minimum	≥3 W/m².sr continuous mode
Uniformity minimum	≥80% (+/- 10%)
Source Type	Infrared LED
Wavelength	850 nm (+/- 15)
Expected Life	> 100 000 hours

Electrical

Input Voltage	24 VDC (continuous mode)
Input Current	≤220 mA (continuous mode)
Cable length	2 M - Ø 2.7 mm (6.56 ft - Ø 0.10")
Connector	None
Cable pinout	
CE Conformity	Yes
Strobe mode	Max. Cur: 0,88 A / Pulse Width: 10ms / Duty Ratio: 1/10


Outer unit

L x W x H	134 x 114.5 x 140 mm (5.28 x 4.51 x 5.51")
Housing Material	Black Anodized Aluminium
Weight	456 g (16.08 oz)
Mounting	4 mounting holes D 4 mm (0.157")

Environmental

Max. Operating Humidity	95% non-condensing
Operating Temperature	50°C (122°F) max
Storage Temperature	60°C (140°F) max
Shelf life	12 months from date of purchase
Max.temp.on housing	+80°C (+176°F)

area of temperature measurement
30mm all along the edges of the back of
the black anodized aluminium housing
(see image)



Do not cover the backlight when it's switched on.

Accessories

Power supply: 110V and 220V
Product key: OMRON-LED-PS-108x100x40-24V

« Strobe » Control Module

GARDASOFT RT Series Led Lighting Controllers
You can find the nearest distributor on
<http://www.gardasoft.com/distributors.php?id=2>


CLASS 0: NO RISK (CIE S2009:2002/NF EN 62471)

RoHS directive compliant

Each PHLOX Backlight is provided with:

- 24 months warranty
- Certificate of uniformity
- Seal of quality on the back

July 21 2015

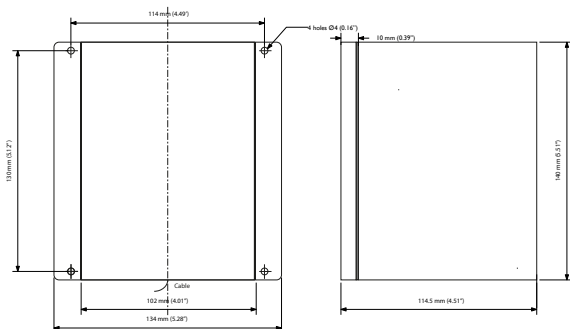

LLUB Backlights by PHLOX® offer the **best life cycle** and the **best uniformity on the market**, all in an ultra compact and IP-65 body.

PHLOX® is the only manufacturer to provide uniformity and radiance datas on the quality control seal positioned at the back of every backlight.


DESIGNED

FOR YOUR APPLICATION

- Bottle inspection (glass and plastic)
- Particle measurement
- Dimensional control
- Shaping control
- Quality control with transparency.

& YOUR INDUSTRIAL SECTOR

- Glassmaking
- Pharmaceutical/Cosmetics
- Automotive
- Agribusiness
- Electronics
- Aeronautics and space.

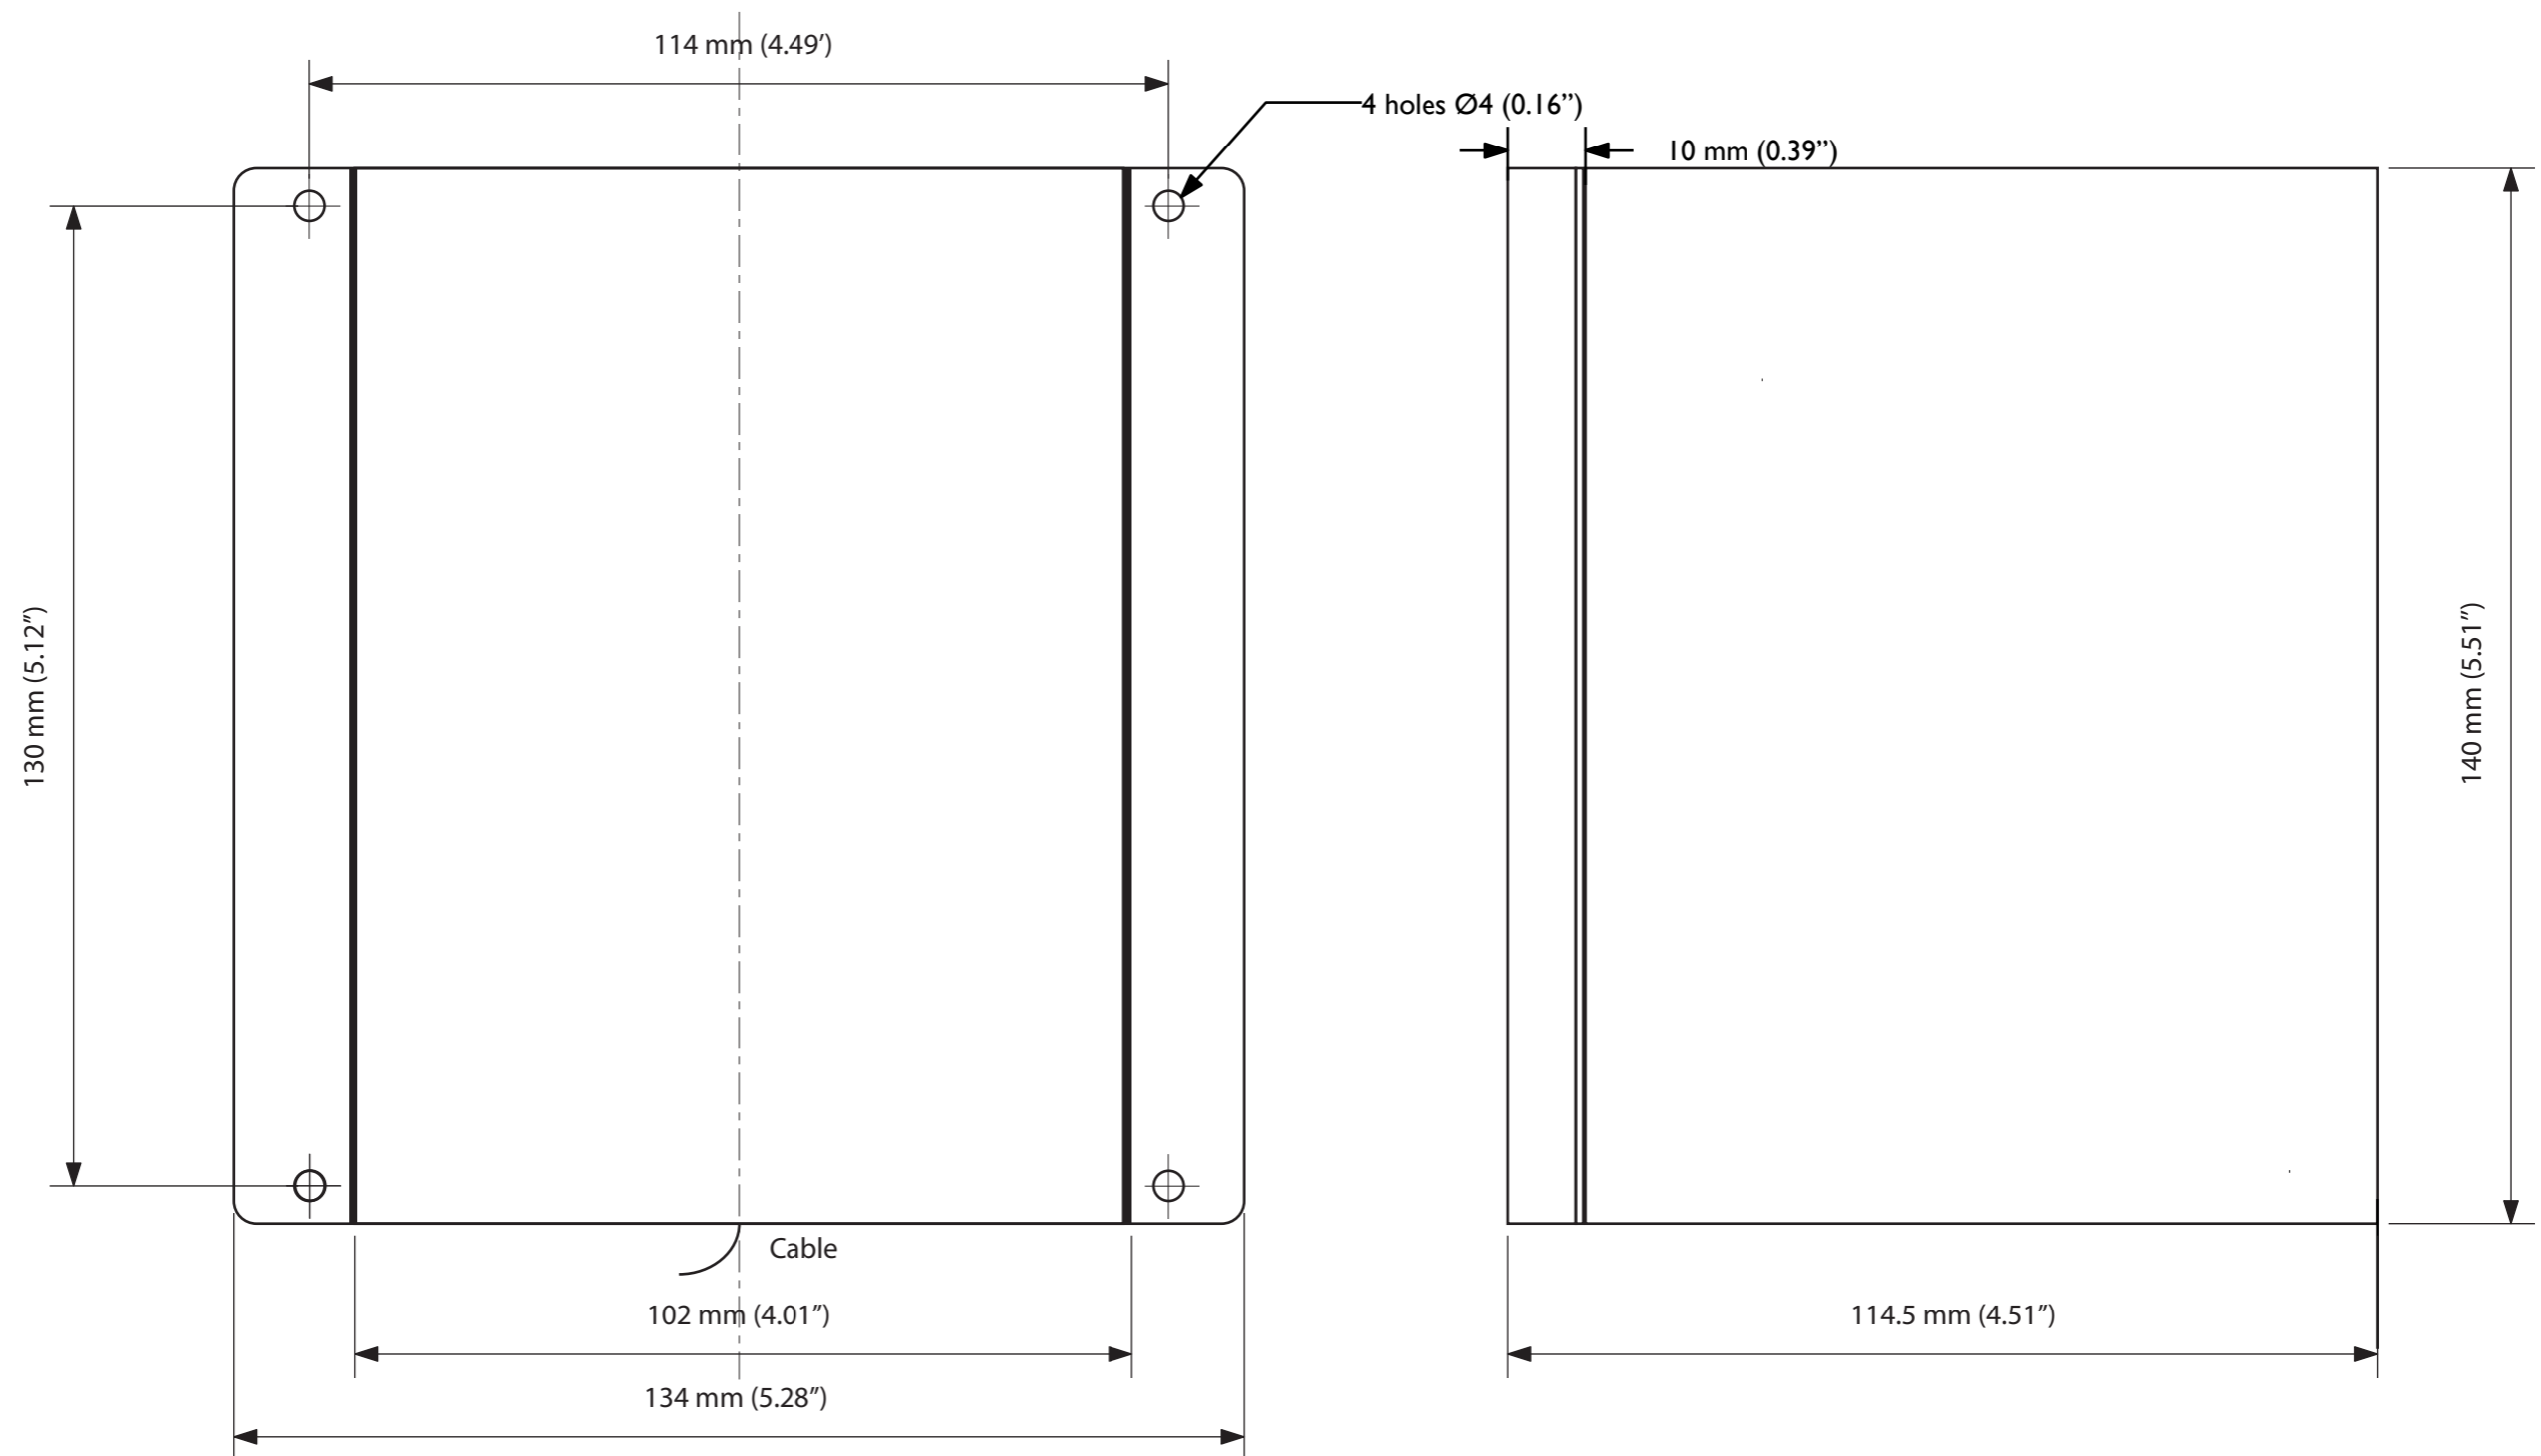

PROPRIÉTÉ DE PHLOX SA- REPRODUCTION INTERDITE SAUF ACCORD ÉCRIT

PHLOX-LEDIR-OA-100X100-LLUB-Q-1R-24V

TEL: 04 42 90 76 20
FAX: 04 42 90 76 21

